

Fig. 1 - Foundation Details For Wetpour/Tiles

Fix dish to base plate using:
 4 x M16 x 30mm Bolts
 4 x M16 Steel Washers
 4 x M16 Plastic Caps

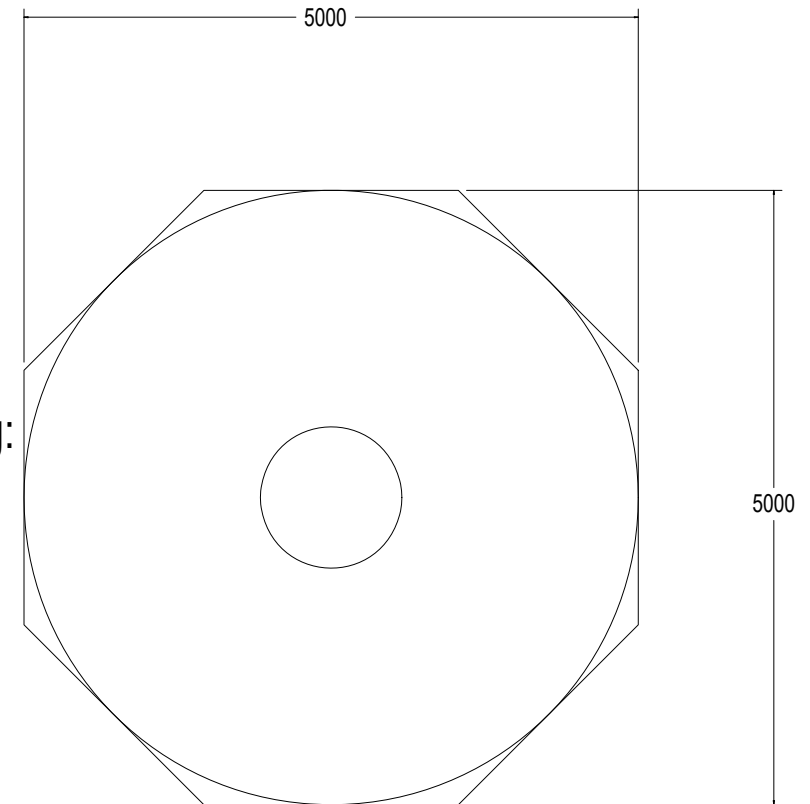


Fig. 2 - Surface Area Dimensions - 21m² @ 1m C.F.H.

Excavate the foundation hole in accordance with Fig 2
 Position the ground fixing in the foundation hole, ensure it is level and at the required depth. Fill with concrete.
 When the concrete has set fit the Dish roundabout top.
 Do not allow the equipment to be used until the concrete has set (2 - 3 days) and the required safety surface has been installed.
 Check if all the fixing bolts are tight.



TITLE Dish Roundabout Installation Details			
DRAWN BY.	S.K.A.	DATE 21/10/14	DRG No. ERB06




 All Play & Leisure's product range is fully compliant with **BS EN 1176:2008**

Technical AT-A-GLANCE

Product Code	ERB06
Equipment Size	1000L x 1000W x 650H
Minimum Space	5000 x 5000
Free Height of Fall	1000
Safety Surface Area	21m ²

Side Elevation

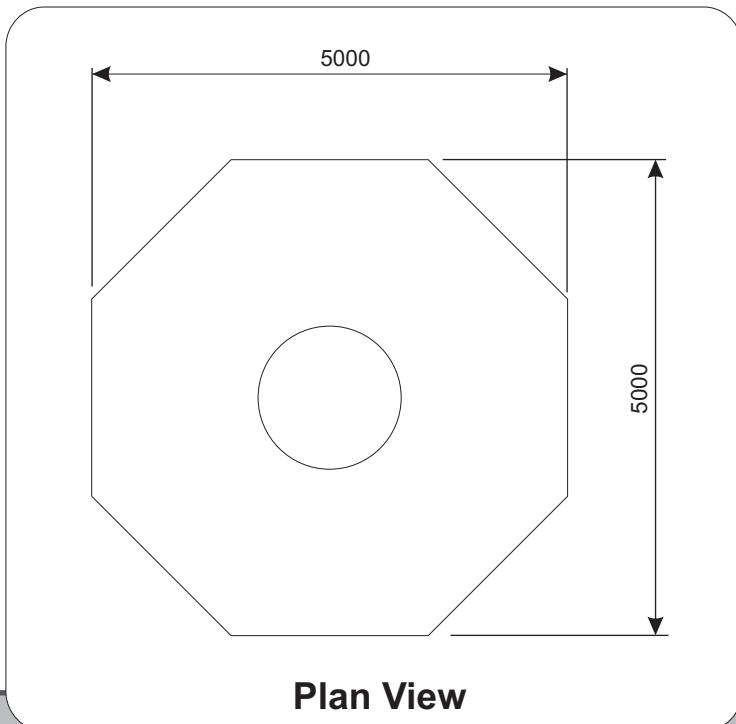

Plan View



Maintenance Schedule

Maintenance & Inspection

All Play & Leisure's products should be inspected and maintained in accordance with the recommendations as detailed in BS EN 1176-7:2008

If any part of the equipment is found to be unsafe during an inspection and cannot be immediately rectified the equipment should be protected against further use.

Routine Visual Inspection.

Routine visual inspections are to be conducted to identify obvious hazards resulting from vandalism, use or weather conditions. e.g. Hazards such as broken parts or broken bottles.

Operational Inspection.

To reduce accidents the operator should ensure an appropriate routine maintenance schedule is established, implemented and maintained. Inspection shall be carried out on a monthly basis, although consideration should be taken regarding local conditions and usage.

During a operational inspection the following should be included:

- Tightening of fastenings.
- Re-painting and re-treatment of surfaces.
- Maintenance of any impact attenuating surfaces.
- Lubrication of bearings.
- Marking of equipment to signify loose fill finished surface levels.
- Cleaning.
- Removal of broken glass and other debris or contaminants.
- Restoring loose fills to the correct level.
- Maintenance of free space areas.

Annual Main Inspection (NOT EXCEEDING 12 MONTHS)

Inspection intended to establish the overall level of safety of equipment, foundation and playing surfaces.

- Effects of weather.
- Rotting or corrosion.
- A change in the level of safety of the equipment as a result of repairs made, or of added or replaced components

One Post Equipment Maintenance.

Special attention should be paid to the stability of products being of a one post design.

Corrective Maintenance.

Corrective maintenance should include measures to correct defects, or to establish the necessary levels of safety of the playground equipment and surfaces. Such measures should include:

- Replacement of fastenings.
- Welding or welding repairs.
- Replacement of worn or defective parts.
- Replacement of defective structural components.

Equipment Alterations.

Alterations to parts of any products that could affect the essential safety of the equipment should only be carried out after consultation with Play and Leisure.

Equipment Identification

Information regarding the manufacturer, I.D. Number, year of manufacturer and the European Standard is displayed on an identification plaque.